

# PRINT ON DEMAND **POD**

## INNOVATIVE TECHNOLOGY TO MAXIMIZE EFFICIENCY



MULTI-LANE  
1-12



720 FRUITS  
PER MINUTE



SOFT TOUCH  
BELLOWS



ADJUSTABLE  
HEIGHT



QUICK CHANGE  
CASSETTE



INTUITIVE  
TOUCH SCREEN

## POD

## MULTI-LANE


Print variable information at the point of application with exceptional quality as fruits and vegetables are conveyed at speed. The Sinclair TruTab<sup>®</sup> label is the only tabbed label available for direct thermal variable print labeling applications.

### TECHNICAL FEATURES



Labeling format	Multi-Lane
Multi-frame bank labeler installations <sup>1</sup>	•
Throughput - Fruit per minute per lane <sup>2</sup>	Up to 720
Number of lanes	1 - 12
Label sizes (width)	18-28mm
Selective labeling interface <sup>3</sup>	•
Applicators synchronize to changing line speeds	Auto
Lane-to-lane timing adjustment	•
Mounting options	Over sizer/grader with Interface
Manual machine frame height adjustment	Electric
Soft-touch, food-safe bellows label application	•
Quick change label cassettes	•
Empty cassette warning light & beacon	•
Chop & blow tape collection system	•
Electrical input voltage range <sup>4</sup>	⚡ 380V 50Hz 3Ph+E ⚡ 480V 60Hz 3Ph+E

<sup>1</sup>Suitable sizers only. <sup>2</sup>Final throughput speed and mounting options dependent on packinghouse configuration.

<sup>3</sup>Requires a sizer output for each image input (up to 4) \* 380-480V 3Ph with Remote Cabinet only

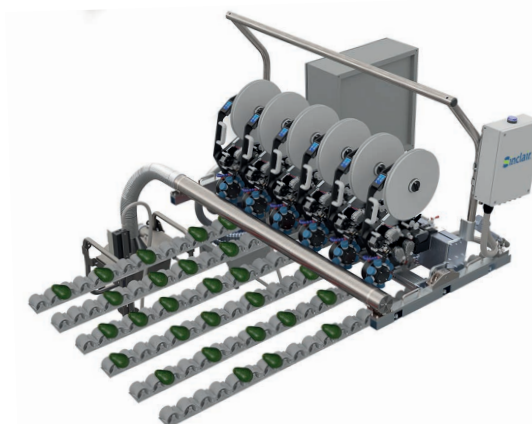

PoD label  
preprinted



PoD label  
with  
variable data



### EXPERTISE & SUPPORT

Our Service Team provides in-field expertise & support as part of your labeling agreement with no hidden costs & for peace of mind.



### BRANDING SOLUTIONS

With sustainable label options available, our food-safe fruit labels come in a variety of types, shapes & sizes - customized to your brand & supply chain needs.

